



REV.	ECO. NO.	APPD
A	REL.	JHONNY 08/19/13

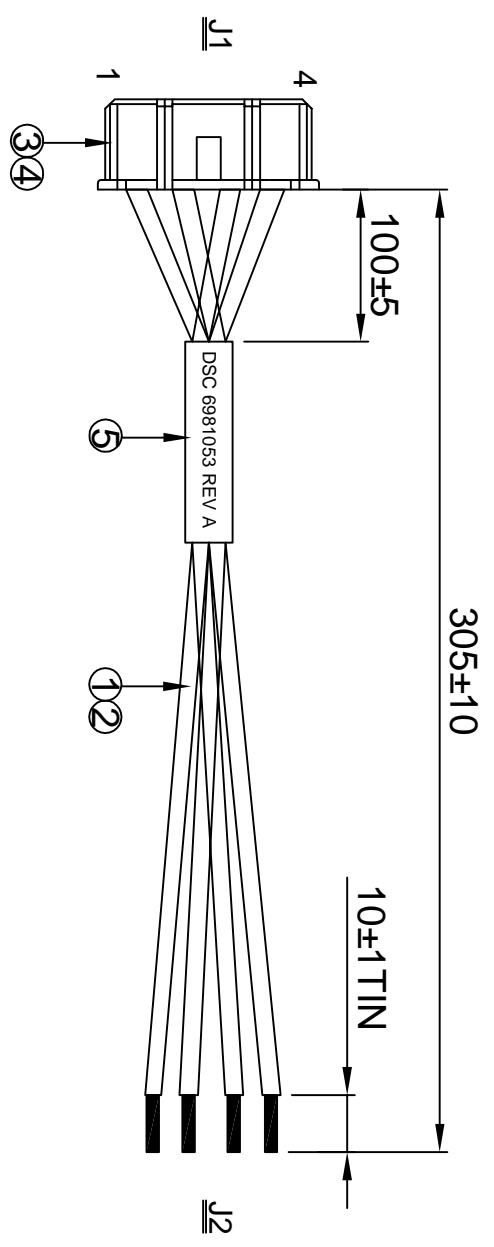

WIRE CONNECTION TABLE	WIRE COLOR	J2
4	BLACK	TIN
3	BLACK	TIN
2	RED	TIN
1	RED	TIN



No.	ITEM	Q'TY	DESCRIPTION	UL NO.
5	LABEL	1PC	W=30.0MM, L=40.0MM, CONTENT:SEE "A"	
4	CONTACT	4PCS	MATERIAL: PHOSPHOR BRONZE, TIN PLATED WIRE RANGE: #26~#22 JST P/N: SPHD-001T-P0.5 WIRE RANGE: #28~#22 JMT P/N: A2006TOP-2	E60389 E144544
3	SP HOUSING	1PC	MATERIAL: NYLON 66, COLOR: NATURAL WHITE PITCH: 2.00MM, 1X4 JST P/N: PAP-04V-S JMT P/N: A2010H00-4P	E144544
2	WIRE	2PCS	UL1007#22, OD=Ø1.6±0.1MM, COLOR: BLACK JACKET: PVC	E170889 & E108485 E72332
1	WIRE	2PCS	UL1007#22, OD=Ø1.6±0.1MM, COLOR: RED JACKET: PVC	E170889 & E108485 E72332

- NOTES:
1. ALL DIMENSIONS ARE "MM".
 2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
 3. Connection Resistance : 2.0Ω
Insulation Resistance : 20MΩ
HI-POT Voltage : 300V DC
 4. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.
 5. PACKAGE: 1PC/BAG.



X:±	XX:±	X':±	.XX':±	PART NO.(INTENDED USE)	TITLE:
.X:±0.5	.XXX:±	X':±	.XXX':±	6981053 REV A	CABLE HARNESS, POWER, 2mm Connector to Flying Leads
DR: YHTJH 08/19/13	CHKD: WUZJUAN 08/19/13	APPD: JHONNY 08/19/13	DWG NO.: GL-CH672		
SCALE	SHEET	REV.			
NONE	1/1	A			

8 02011B