


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		2011/11/09	

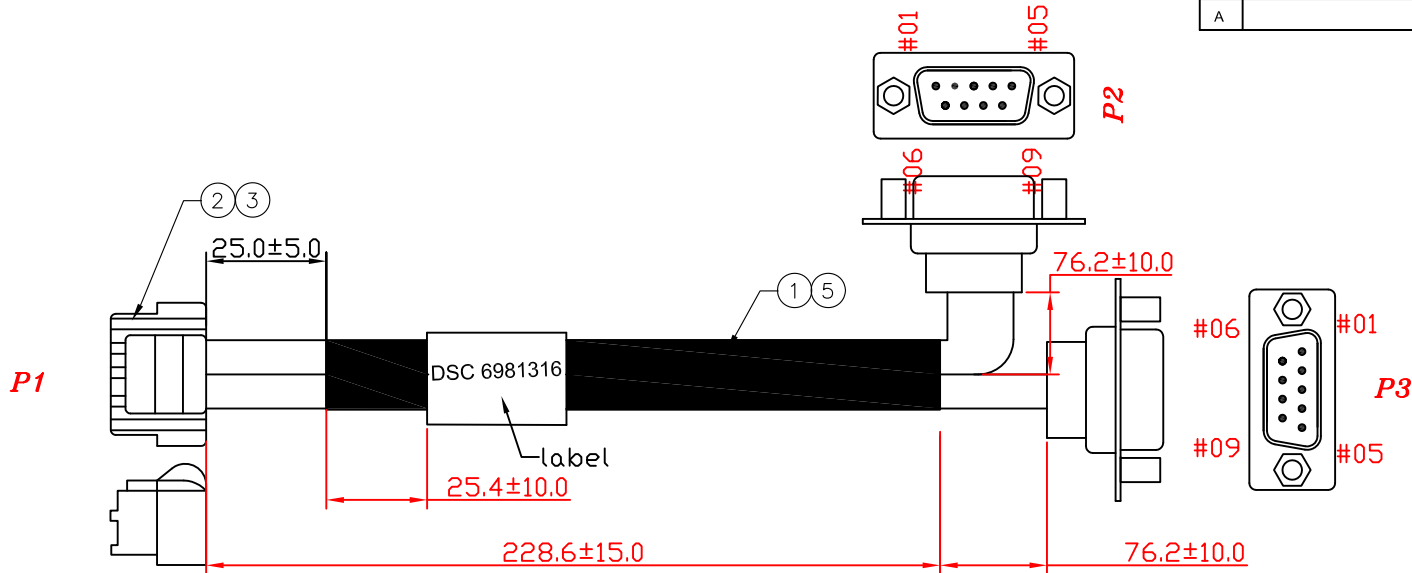

Electrical Properties:

1. It should be no any open /short, miswiring and intermittent.
2. The cable should be 100% electrical test.
3. Voltage test: DC 300V 100ms.
Insulation resistance: 5.0M ohm/Min;
Conductance resistance: 5.0 ohm/Max.

APPROVED BY
COMPANY: _____
PURCHASING/ENGINEER: _____
DATE: _____

Machinery Character:

1. All dimension are " mm/inch " except specified.
2. Package: TBD.
3. Cable ass'y shall be RoHS compliant and UL certified.
4. The cable should be clean, free of oiled/ flash/ burred.

PIN OUT

P1	Color	P2	P3
1	black	3	
2	red	2	
3	orange	5	
5	yellow	7	
6	blue	8	
4	purple		5
9	gray		2
10	white		3

Item	DESCRIPTION	UNIT	QTY
5	heat Shrink tube	EA	1
4	P2,P3 conn : DB 9Pin male crimp type with hex nuts, inside black pin gold flash .	EA	2
3	Terminal: 1.50mm pitch (JST P/N: SZPD-002T-P0.3)	EA	8
2	P1 Housing: 1.50mm pitch (JST P/N: ZPDR-10V-S)	EA	1
1	Wire : UL1061 24AWG(11/0.16MM) 80°C 300V Color: black , red , orange , yellow , blue , purple , gray , white.	FT	8

X ±	X° ±	NAME:	WINSTRONICS		
.X ±	.X° ±	W1			
.XX ±	.XX° ±	UNITS:	PART NO.:	TITLE: Cable harness COM	
		MM	6981316	1.5mm Conn to 2xDB9M	
			Tom	DWG NO.:	
			2011/11/09	RFQ#DIA1111024-02W	
APPD BY	CHECK BY	DRAWN BY		SCALE	SHEET
			NONE	1/1	REV. A

1

2

3

4

5

6