


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		2012/09/14	

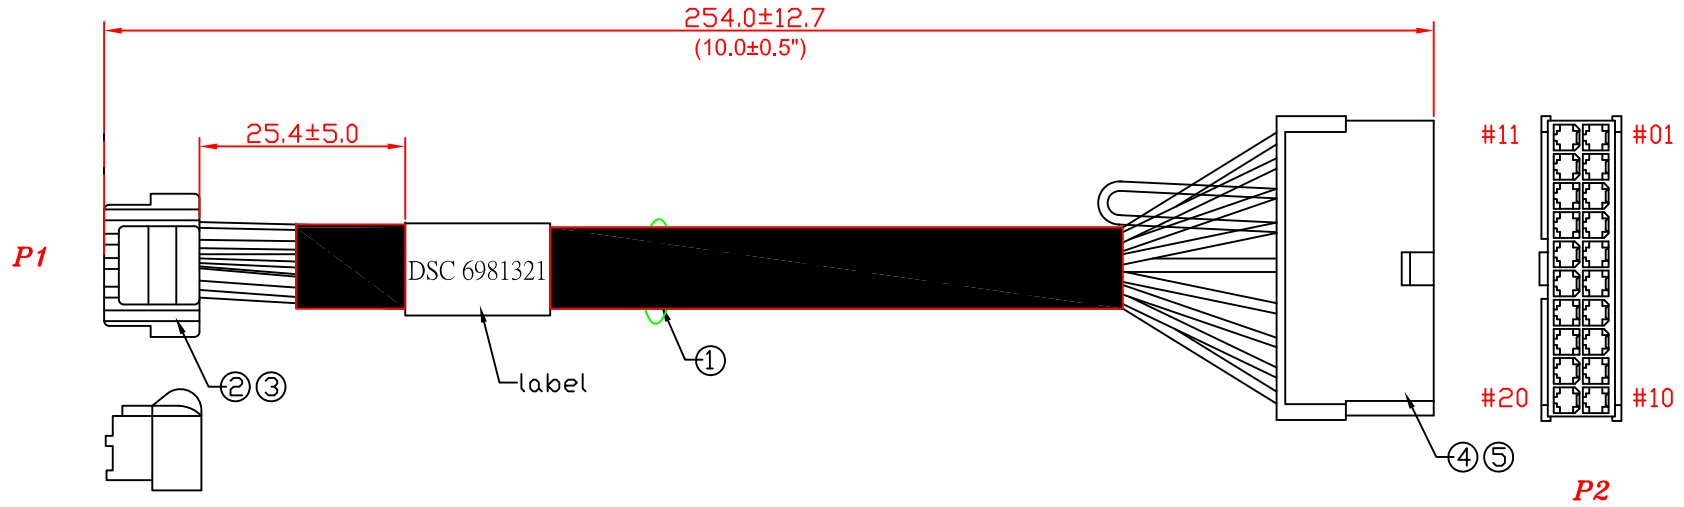

Electrical Properties:

1. It should be no any open /short, miswiring and intermittent.
2. The cable should be 100% electrical test.
3. Voltage test: DC 300V 100ms.
Insulation resistance: 5.0M ohm/Min;
Conductance resistance: 5.0 ohm/Max.

Machinery Character:

1. All dimension are " mm/inch " except specified.
2. Package: TBD.
3. Cable ass'y shall be RoHS compliant and UL certified.
4. The cable should be clean, free of oiled/ flash/ burred.

APPROVED BY	
COMPANY:	_____
PURCHASING/ENGINEER:	_____
DATE:	_____

PIN OUT

P1	P2	Color	P1	P2	Color
1	3	BLACK	7	13	BLACK
2	4	RED	8	20	RED
3	5	BLACK	9	16	BLACK
4	6	RED	10	10	YELLOW
5	7	BLACK		14	GREEN
6	19	RED		15	GREEN

Item	DESCRIPTION	EA	1
6	heat shrink tube	EA	1
5	P2 Housing: 4.20mm pitch(JWT P/N: C4201H02-2*10PNL).	EA	1
4	Terminal : 4.20mm pitch(JWT P/N: C4201T2B-2).	EA	12
3	Terminal: 1.50mm pitch (JST P/N: SZPD-002T-P0.3)	EA	12
2	P1 Housing: 1.50mm pitch (JST P/N: ZPDR-12V-S)	EA	1
1	Wire: UL1061 24AWG(11/0.16mm), 80°C 300V, Color : red, black , yellow .	FT	

X ±	X° ±	NAME:	WINSTRONICS		
.X ±	.X° ±	W1			
.XX ±	.XX° ±	UNITS:	PART NO.:	TITLE:	
		MM	6981321	Power, 1.5mm conn to 20P ATX	
			Tom	DWG NO.:	
		APPD BY	CHECK BY	DRAWN BY	
SCALE	SHEET	REV.			
NONE	1/1	A			