



REV.	ECO.	NO.	APPD
A	REL.		JHONNY 09/23'13

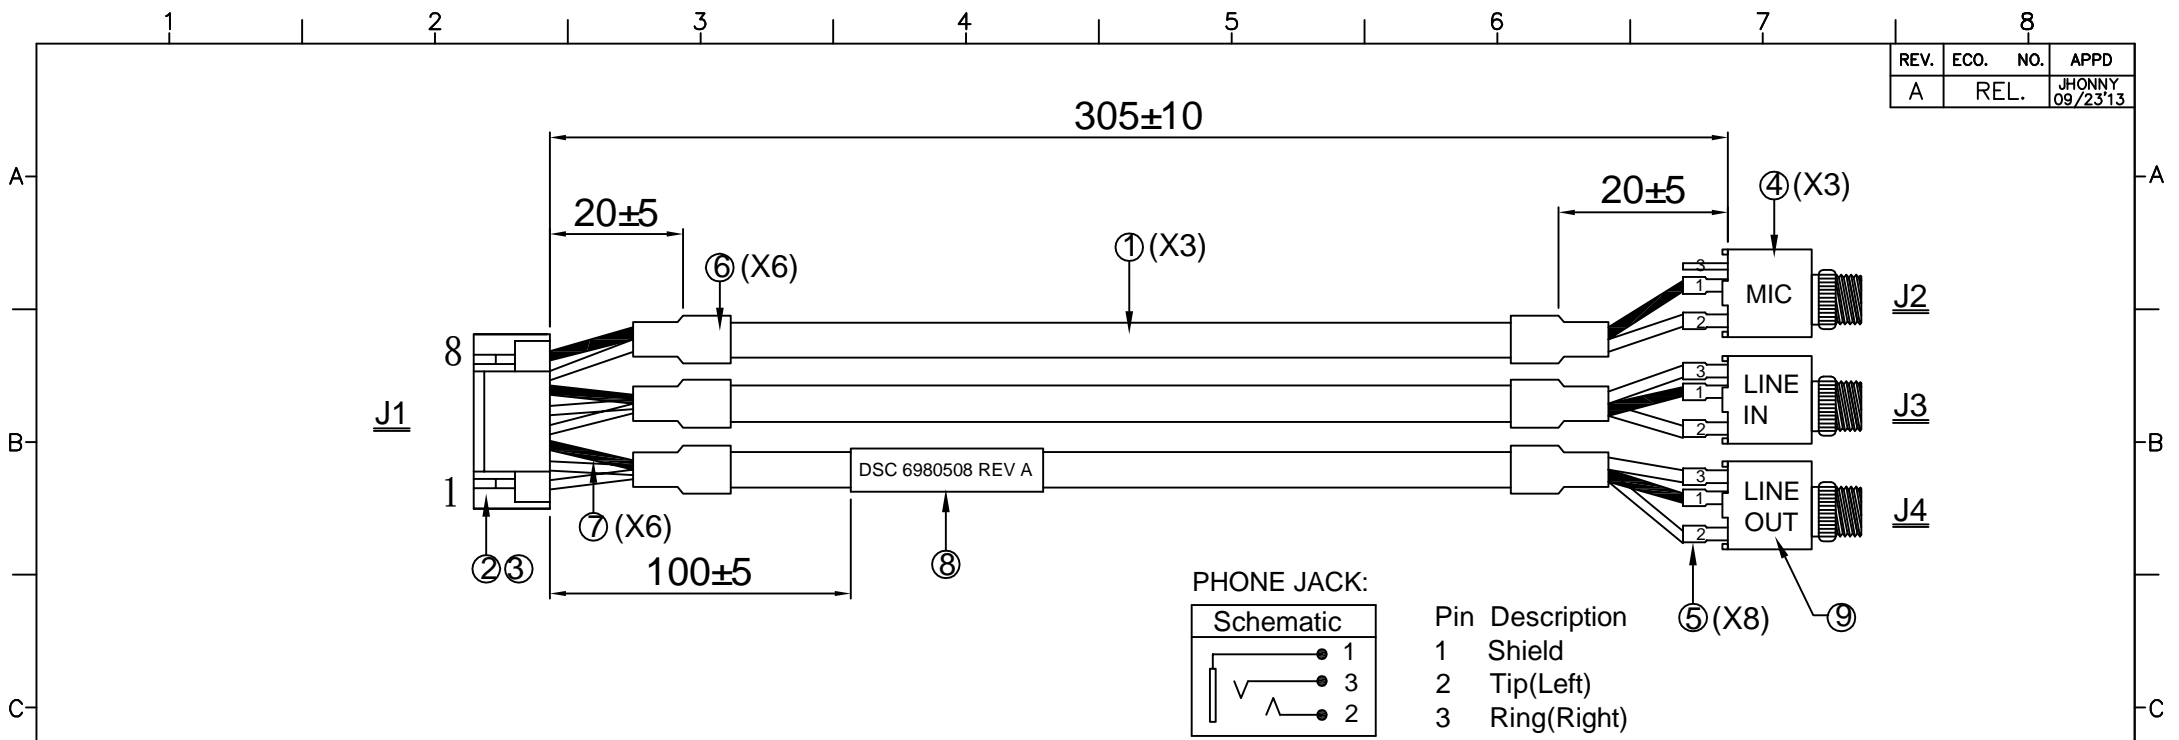


Pin Description

1	Shield
2	Tip(Left)
3	Ring(Right)

8	GND	1		
7	RED	2		
6	GND		1	
5	WHITE		3	
4	RED		2	
3	GND			1
2	WHITE			3
1	RED			2
J1	WIRE COLOR	J2	J3	J4

WIRE CONNECTION TABLE

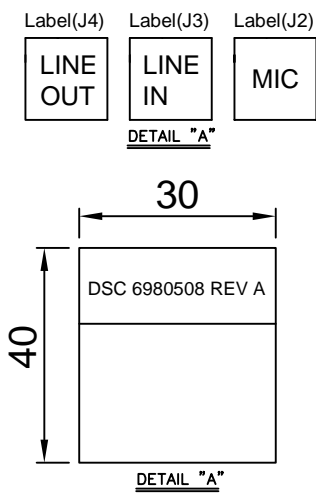

9	LABEL	3PCS	W=5.0MM, L=5.0MM, CONTENT:SEE"A"	
8	LABEL	1PCS	W=30.0MM, L=40.0MM, CONTENT:SEE"A"	
7	H.S. TUBE	6PCS	I.D=Ø0.8MM, UL224, COLOR:BLACK, L=20MM 125°C, 600V, VW-1 P/N:H-2(+)& RSFR-H 125°C, 300V, VW-1 P/N:H-2(CB)& RSFR(CB)	E255394 & E203950
6	H.S. TUBE	6PCS	I.D=Ø3.0MM, UL224, COLOR:BLACK, L=15MM 125°C, 600V, VW-1 P/N:H-2(+)& RSFR-H 125°C, 300V, VW-1 P/N:H-2(CB)& RSFR(CB)	E255394 & E203950
5	H.S. TUBE	8PCS	I.D=Ø1.5MM, UL224, COLOR:BLACK, L=10MM 125°C, 600V, VW-1 P/N:H-2(+)& RSFR-H 125°C, 300V, VW-1 P/N:H-2(CB)& RSFR(CB)	E255394 & E203950
4	Ø3.5MM AUDIO PHONE JACK	3PCS	MATERIAL:HOUSING PBT, COLOR:BLACK Ø3.5MM AUDIO PHONE JACK NUT:BRASS NI PLATED P/N:PJ301CM	
3	CONTACT	8PCS	MATERIAL:PHOSPHOR BRONZE, TIN PLATED WIRE RANGE:#30~#26, JST P/N:SSH-002T-P0.2 WIRE RANGE:#32~#28, JCTC P/N:11257TOP-2E	
2	8P HOUSING	1PCS	MATERIAL:PBT, UL94V-0, COLOR:NATURAL WHITE PITCH:1.25MM, 1X8 JST P/N:GHR-08V-S JCTC P/N:11257H00-10P-L	E60389 E338796
1	CABLE	3PCS	UL2547#28x2C(RED,WHITE)+S JACKET:PVC,COLOR:BLACK, OD:3.0MM	E238846
No.	ITEM	Q'TY	DESCRIPTION	UL NO.

- NOTES:
- ALL DIMENSIONS ARE "MM".
  - ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
  - Connection Resistance : 2.0Ω  
Insulation Resistance : 20MΩ  
Hi-POT Voltage : 300V DC  
Hi-POT Duration : 10mS
  - THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.
  - PACKAGE:1PC/BAG.



X.:±	.XX:±	X°. :±	.XX° :±	PART NO.(INTENDED USE) 6980508 REV A	TITLE: CABLE HARNESS, AUDIO 1.25MM CONNECTOR TO 2*3.5MM PANEL MOUNT STEREO AND 1*3.5MM MONO JACKS
.X:±0.5	.XXX:±	.X° :±	.XXX° :±	APPD: JHONNY 09/23'13	DWG NO.: GL-GH666
				CHKD: WUZUJIAN 09/23'13	SCALE SHEET REV. NONE 1/1 A
				DR: YHTJH 09/23'13	

