



REV.	ECO. NO.	APPD
A	REL.	JHONNY 08/19/13

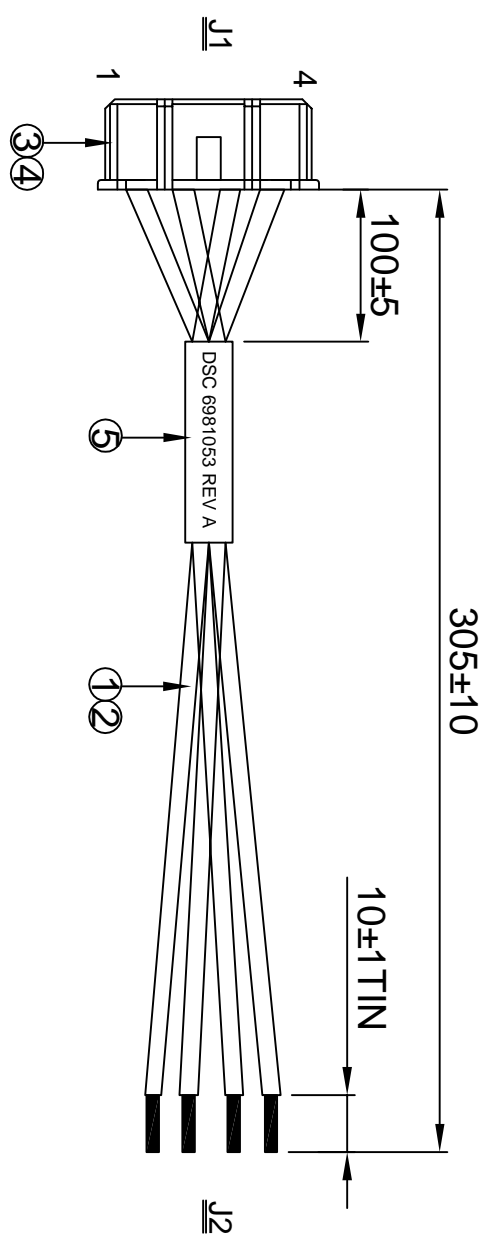

4	BLACK	TIN
3	BLACK	TIN
2	RED	TIN
1	RED	TIN
J1	WIRE COLOR	J2

WIRE CONNECTION TABLE



No.	ITEM	Q'TY	DESCRIPTION	UL NO.
5	LABEL	1PC	W=30.0MM, L=40.0MM, CONTENT:SEE "A"	
4	CONTACT	4PCS	MATERIAL:PHOSPHOR BRONZE, TIN PLATED WIRE RANGE:#26~#22 JST P/N:SPHD-001T-P0.5 WIRE RANGE:#28~#22 JMT P/N:A2006TOP-2	E60389 E144544
3	SP HOUSING	1PC	MATERIAL:NYLON 66, COLOR:NATURAL WHITE PITCH:2.00MM, 1X4 JST P/N:PAF-04V-S JMT P/N:A2010H00-4P	E144544
2	WIRE	2PCS	UL1007#22, OD=Ø1.6±0.1MM, COLOR:BLACK JACKET:PVC	E170889 & E108485 E72332
1	WIRE	2PCS	UL1007#22, OD=Ø1.6±0.1MM, COLOR:RED JACKET:PVC	E170889 & E108485 E72332

- NOTES:
1. ALL DIMENSIONS ARE "MM".
  2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
  3. Connection Resistance : 2.0Ω  
Insulation Resistance : 20MΩ  
HI-POT Voltage : 300V DC
  4. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.
  5. PACKAGE: IPC/BAG.



X:±	XX:±	X':±	.XX':±	PART NO.(INTENDED USE)	TITLE:
.X:±0.5	.XXX:±	.X':±	.XXX':±	6981053 REV A	CABLE HARNESS, POWER, 2mm Connector to Flying Leads
APPD:	JHONNY 08/19/13	CHKD:	WUZHUAN 08/19/13	DWG NO.:	GL-CH672
DR:	YHTJH 08/19/13	SCALE	SHEET	REV.	
		NONE	1/1	A	

1 2 3 4 5 6 7 8 02011B